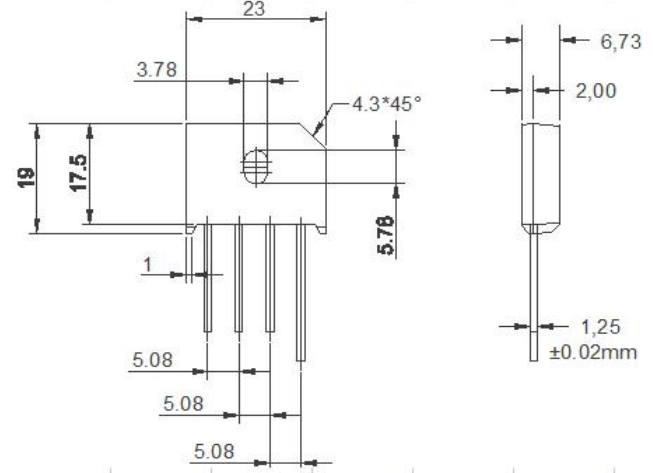


CURRENT 10 Ampere  
 VOLTAGE RANG 50 to 1000 Volts

## KBU10005 THRU KBU1010

特征/Features	外形尺寸/Outline Dimensions
<ul style="list-style-type: none"> <li>◆ GPP芯片 Glass passivated chip</li> <li>◆ 低反向漏电流 Low Reverse Leakage Current</li> <li>◆ 高耐浪涌电流能力 High surge current capability</li> <li>◆ 接线端与壳体间绝缘耐压2500V Case to Terminal Isolation Voltage 2500V</li> </ul>	<p><b>Case: KBU Series</b>                      Dimensions in millimeters</p> 
机械参数/Machanical Data	
<ul style="list-style-type: none"> <li>◆ 本体: 塑封 Case: plastic package</li> <li>◆ 标识/极性: 本体标记 Marking / Polarity: Marked on Body</li> <li>◆ 重量: 约克 Weight: About 6.66 grams</li> </ul>	

### 极限值/Maximum Ratings and Thermal Characteristics @ Ta = 25°C unless otherwise noted

符号 Symbol	特性 Characteristic	KBU10							单位 Unit
		005	01	02	04	06	08	10	
V <sub>RRM</sub>	最大反向重复峰值电压 Maxmum Recurrent Peak Reverse Voltage	50	100	200	400	600	800	1000	V
I <sub>F</sub> (AV)	平均整流输出电流 Average Forward Output Rectified Current@Ta =85°C	10							A
V <sub>F</sub>	正向峰值电压 Forward Voltage Per Leg @I <sub>FM</sub> =10.0A	1.1							V
I <sub>FSM</sub>	正向浪涌电流 Peak Forward Surge Current 8.3ms Single Half Sine-wave superimposed on rated load	200							A
I <sub>R</sub>	反向漏电流 Maximum DC reverse current at rated DC blocking voltage per leg	5 500							uA
i <sup>2</sup> t	热容值 Rating for fusing (t<8.3ms)	166							A <sup>2</sup> S
V <sub>isol</sub>	绝缘耐压 Rms isolation voltage from case to leads	2500							V
R <sub>θJC</sub>	热阻 Maximum thermal resistance per leg	4.2							°C/W
T <sub>j</sub> , T <sub>STG</sub>	结温, 存储条件 Operating Junction and storage temperature range	-55~150							°C

Note:  
 (1) Junction to case with heatsink  
 (2) Recommended mounting position is to bolt down on heatsink with silicone thermal compound for maximum heat transfer with M3 screw .

CURRENT 10 Ampere  
 VOLTAGE RANG 50 to 1000 Volts

**KBU10005 THRU KBU1010**

■ 特性曲线 (典型) Characteristics(Typical)

Fig 1-forwardCurrent derating Curve  
 图1正向电流降额曲线

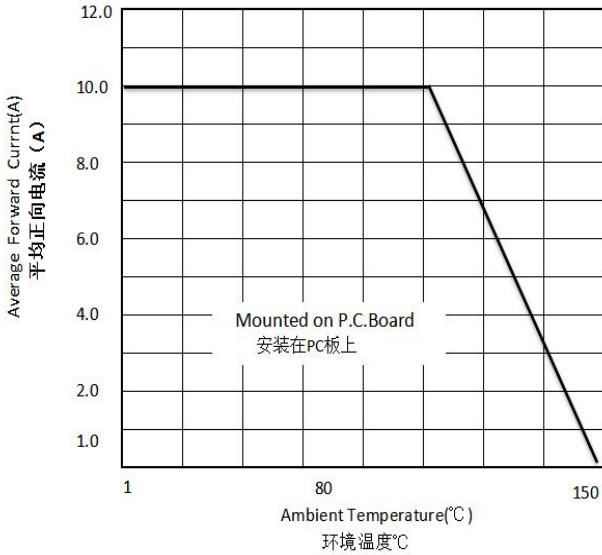


Fig.2-Maximum Non-Repetitive Surge Current  
 图2最大不重复正向浪涌曲线

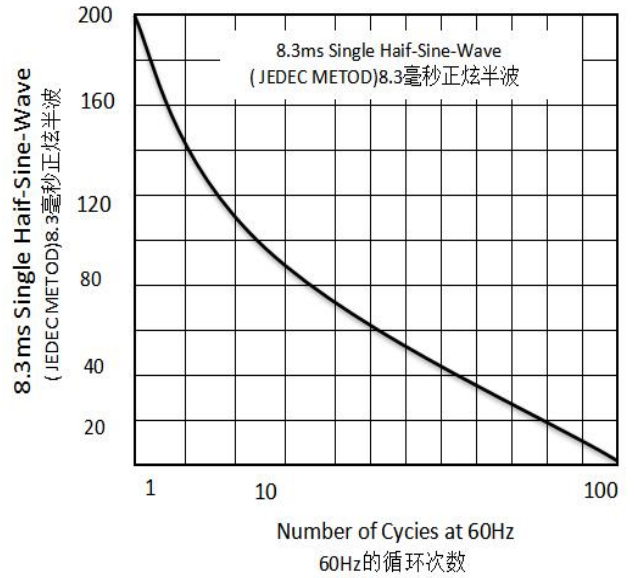


Fig.3-Typical Reverse Characteristics  
 图3.典型的反向特性

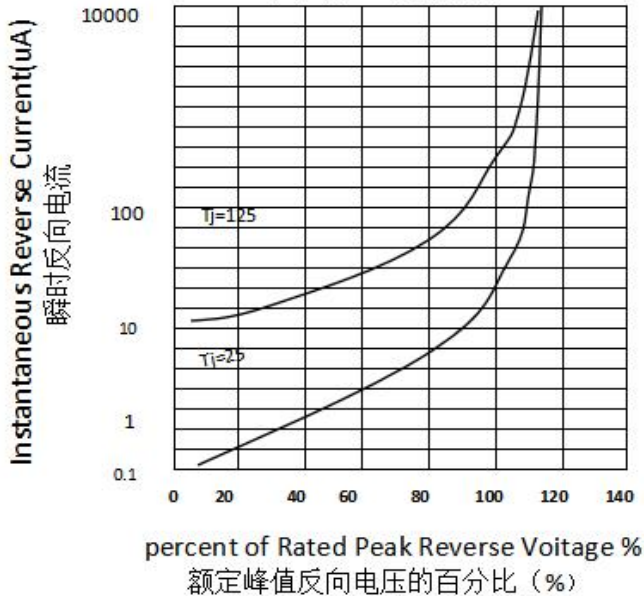


Fig.4-Typical Forward Characteristics  
 图4.典型的正向特性

