

CURRENT 1.0 Ampere  
 VOLTAGE RANG 50 to 1000 Volts

**S1AB THRU S1MB**


**FEATURES**

- For surface mounted applications
- Glass passivated junction
- Low profile package
- Built-in strain relief, ideal for automated placement
- Plastic package has underwrites laboratory flammability Classification 94V-0
- High temperature soldering guaranteed:  
250 /10 second at terminals

**MECHANICAL DATA**

- Case: JEDED SMB (DO-214AA) molded plastic
- Terminals: Plated axial lead solderable per MIL-STD-750, method 2026
- Polarity: Color band denotes cathode end
- Mounting position: Any
- Weight: 0.003ounce, 0.0094 gram

**DO-214AA (SMB)**

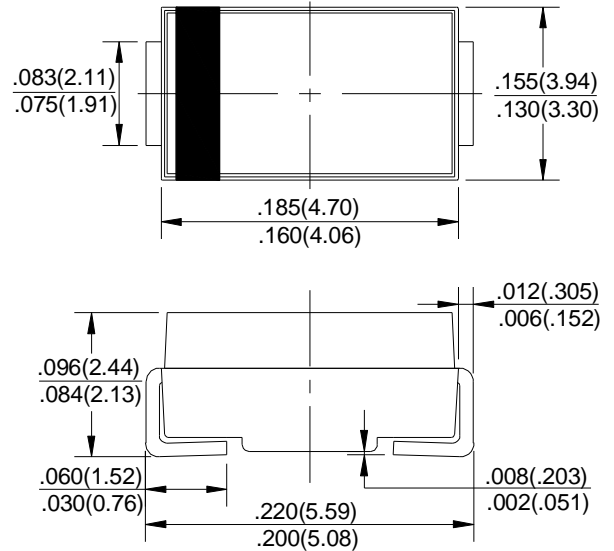

Dimensions in inches and (millimeters)

**MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS**

- Ratings at 25 ambient temperature unless otherwise specified.
- Single phase, half wave, 60Hz, resistive or inductive load.
- For capacitive load derate current by 20%

	SYMBOLS	S1A	S1B	S1D	S1G	S1J	S1K	S1M	UNIT
Maximum Repetitive Peak Reverse Voltage	$V_{RRM}$	50	100	200	400	600	800	1000	Volts
Maximum RMS Voltage	$V_{RMS}$	35	70	140	280	420	560	700	Volts
Maximum DC Blocking Voltage	$V_{DC}$	50	100	200	400	600	800	1000	Volts
Maximum Average Forward Rectified Current (see Fig.1)	$I_{F(AV)}$	1.0							Amps
Peak Forward Surge Current 8.3ms single half sine wave superimposed on rated load (JEDEC method) $T_{1-90}$	$I_{FSM}$	30							Amps
Maximum Instantaneous Forward Voltage at 1.0A	$V_F$	1.1							Volts
Maximum DC Reverse Current at rated DC Blocking Voltage at	$T_A = 25$	5.0							A
	$T_A = 125$	50							
Typical Junction Capacitance (NOTE 1)	$R_{0JA}$	50							/W
	$R_{0JL}$	90							
Typical Thermal Resistance (NOTE 2)	$t_{rr}$	1.8							s
Operating and Storage Temperature Range	$T_J, T_{STG}$	-55 to +150							

**Notes:**


1. Thermal resistance from Junction to ambient and from junction to lead mounted on 0.2×0.2" (5.0 × 5.0mm) copper pad areas.
2. Reverse recovery test condition:  $I_F=0.5A$ ,  $I_R=1.0A$ ,  $I_{rr}=0.25A$

CURRENT 1.0 Ampere  
 VOLTAGE RANG 50 to 1000 Volts


**S1AB THRU S1MB**

RATING AND CHARACTERISTIC CURVES S1A Thru S1M


F1G.1-FORWARD CURRENT DERATING CURVE

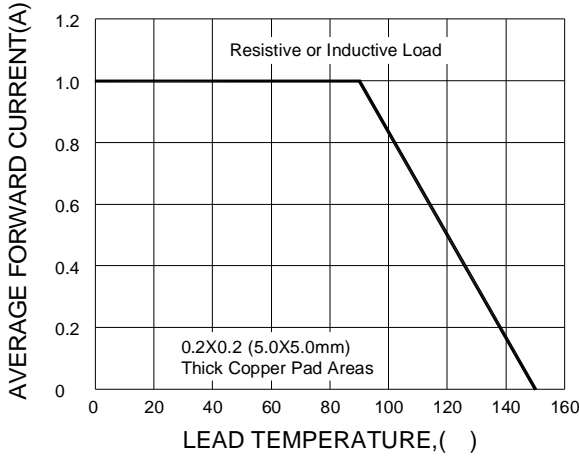


F1G.2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

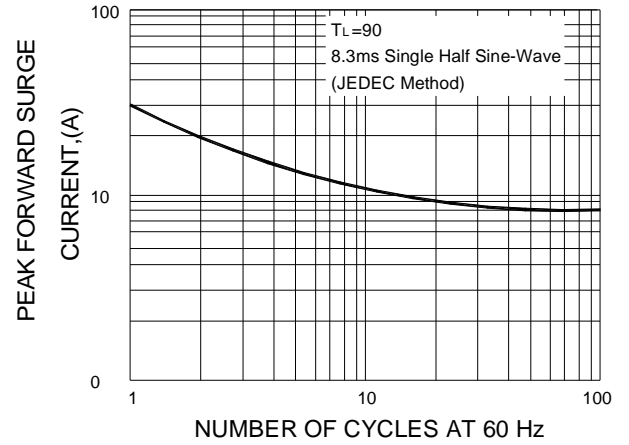


F1G.3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

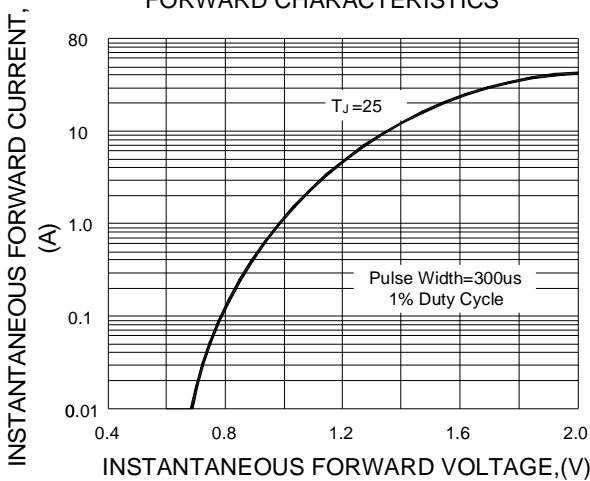

F1G.4-TYPICAL REVERSE CHARACTERISTICS

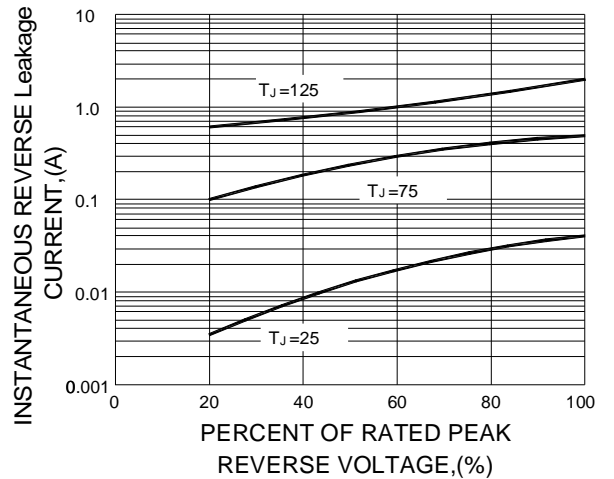

F1G.5-TYPICAL JUNCTION CAPACITANCE

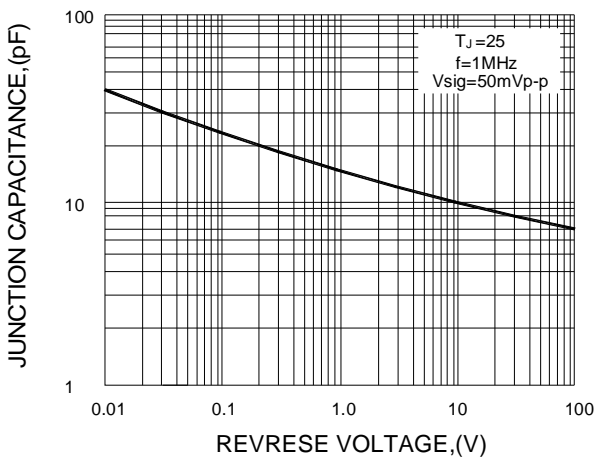

F1G.6-TRANSIENT THERMAL IMPEDANCE

